

KOMPRESORY EKOM  
COMPRESSORS EKOM

## KOMPAKT 5, KOMPAKT 10

integral - stabil - silent (with box)



	KOMPAKT.5	KOMPAKT.10	
⚡/Hz	230/50(60)	230/50(60)	V/Hz
🔌	0,75	0,75	kW
🔧 /5 bar	60	60	l.min <sup>-1</sup>
🕒	4.5 - 6.0	4.5 - 6.0	bar
📦 (Lit.)	5	10	lit.
👂 stabil	65	65	dB(A)
👂 silent	45	45	dB(A)
📦 integral	32	33	kg
📦 stabil	34	36	kg
📦 silent	46	49	kg
📦 integral	255 x 370 x 470	305 x 370 x 500	mm
📦 stabil	290 x 430 x 495	330 x 430 x 525	mm
📦 silent	380 x 525 x 575	420 x 525 x 620	mm

KOMPRESORY EKOM  
COMPRESSORS EKOM

## PLUS, 2V

stabil - silent (with box)

	PLUS	2V
⚡/Hz	230/50(60)	230/50
🔌	0,75	1,1
🔧 /5 bar	60	120
🕒	4.5 - 6.0	5.0 -
📦 (Lit.)	25	25
👂 stabil	66	71
👂 silent	48	53
📦 stabil	44	48
📦 silent	73	83
📦 stabil	460 x 460 x 690	460 x 460
📦 silent	550 x 550 x 790	550 x 600

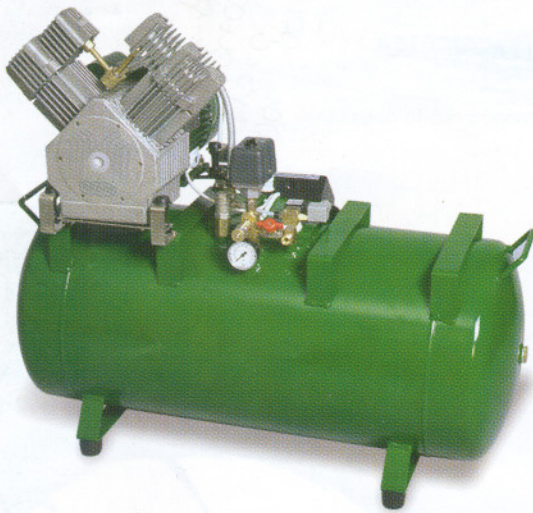

KOMPRESORY EKO  
COMPRESSORS EKOM

## 2V/110, 2x2V/110

	2V/110	2 x 2V/110	
⚡/Hz	230/50 (3 x 400/50)	230/50 (3 x 400/50)	V/Hz
🔌	1.1	2 x 1.1	kW
🔧 /5 bar	120	240	l.min <sup>-1</sup>
🕒	5 - 7	5 - 7	bar
📦 (Lit.)	110	110	lit.
👂	70	72	dB(A)
📦	68	106	kg
📦	1090 x 430 x 870	1090 x 430 x 870	mm



BEZOLEJOV  
OILFREE CO

## DUPLE

⚡/Hz	
🔌 /5 bar	
🕒	
📦 (Lit.)	
👂	
📦	
📦	




# ekom



ADSORPCN  
ADSORPTIC  
MONZ

V/Hz
kW
L.min <sup>-1</sup>
bar
lit.
dB(A)
dB(A)
kg
kg
mm
mm

⚡/Hz
🔧 /5 bar
🔧 DRY
Operation

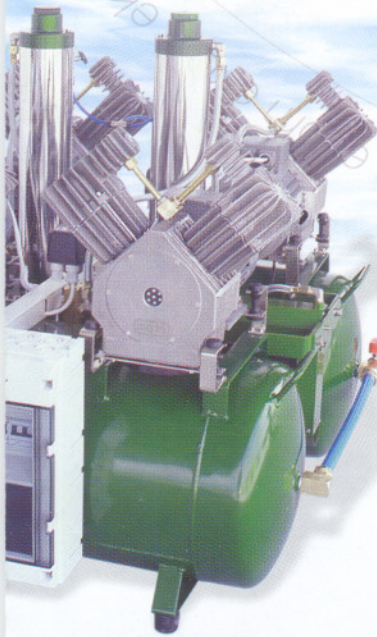

KOMPRESOROVÁ JEDNOTKA EKOM  
COMPRESSOR UNIT EKOM OF THE LINE

KOMPRESORY EKOM S ODSÁVAČKOU  
KOMPRESSORS EKOM WITH SUCTION MACHINE  
**DUO, DUO 2V**

DUPLEX	
3 x 400/50	V/Hz
420	L.min <sup>-1</sup>
5 - 7	bar
220	lit.
atmospheric dew point -20	°C
73	dB(A)
250	kg
970 x 1120 x 900	mm

	DUO	DUO - 2V	
⚡/Hz	220/60	220/60	V/Hz
🔧 /5 bar	60	120	L.min <sup>-1</sup>
🕒	4.5 - 6.0	5.0 - 7.0	bar
📦 Lit.	25	25	lit.
🔊 (max)	1100	1100	L.min <sup>-1</sup>
🔊 (max)	-120	-120	mbar
Control of the suction pump	24/0.1	24/0.1	V/A DC / AC
🔊	49	53	dB(A)
📦	103	112	kg
📏	550 x 550 x 1260	550 x 600 x 1260	mm




KONDENZAČNO FILTRAČNÁ JEDNOTKA  
CONDENSING AND FILTRATION UNIT

KJF



MONZUN			
M1	M2	M3	
	230/50		V/Hz
120	240	120	lit. min <sup>-1</sup>
atmospheric dew point -20 °C			°C
interrupt	continuous		

	KJF 1	KJF 2	
/5 bar	120	240	lit. min <sup>-1</sup>
Degree of filtration	30 / (5)		µm
Filter drainage system	automatic		

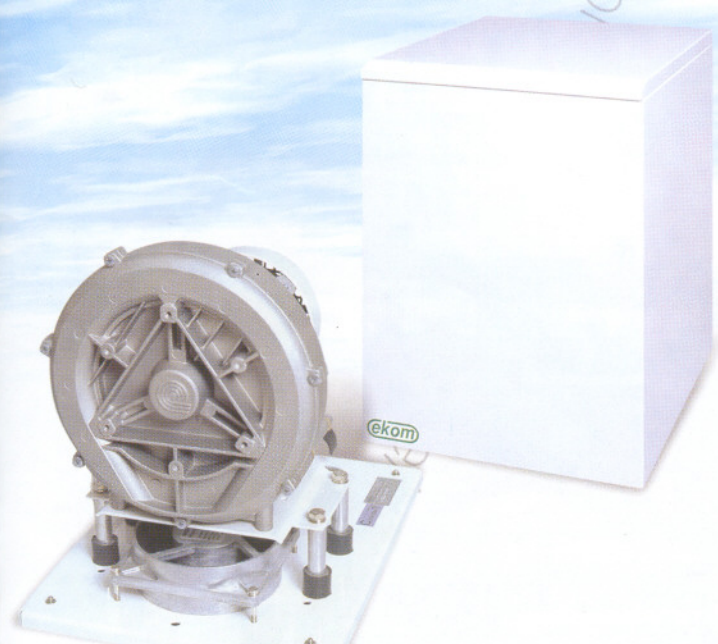

ODSÁVAČKY EKOM  
DENTAL SUCTION MACHINES EKOM

DO 2.1 stabil - silent (with box)

		DO 2.1	
	Hz	230/50	V/Hz
Nominal input		450	VA
(max)		1100	l.min <sup>-1</sup>
(max)		-120	mbar
Operating voltage		24/0.1	V/A DC/AC
	silent	50	dB(A)
	stabil	15	kg
	silent	27	kg
	stabil	330 x 430 x 450	mm
	silent	420 x 525 x 620	mm

MOBILNÉ ODSÁVAČIE ZARIADENIE  
MOBILE DENTAL SUCTION UNIT

ASPINA



		ASPINA	
	Hz	230/50	V/Hz
(max)		1100	l.min <sup>-1</sup>
(max)		-120	mbar
		48	dB(A)
		38	kg
		350 x 565 x 860	mm

